



# AFCTN Test Report 93-051

AFCTB-ID  
93-083



**Technical Raster Transfer**



**Using:**


**Cubic Defense Systems' Data**



**MIL-R-28002A (Raster)**



**Quick Short Test Report**



**20 August 1993**

**DISTRIBUTION STATEMENT A**


Approved for public release;  
Distribution Unlimited

Prepared for

*Electronic Systems Center*

**DTIC QUALITY INSPECTED 3**

# DISCLAIMER NOTICE

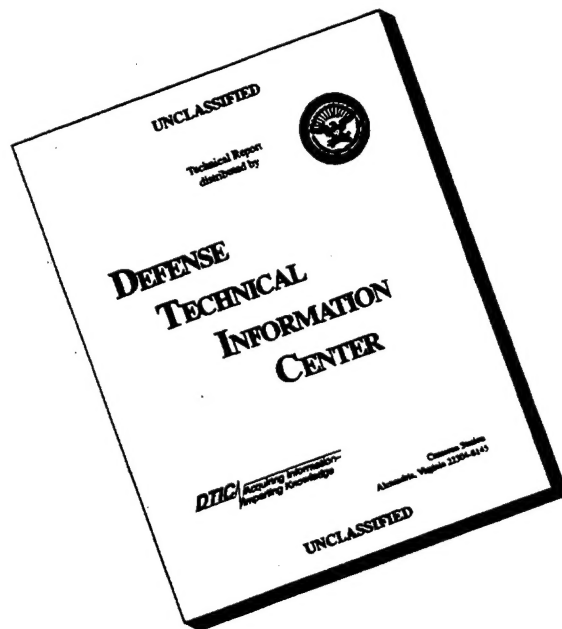

**THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.**

---

**Technical Raster Transfer**  
**Using:**  
**Cubic Defense Systems' Data**

**MIL-R-28002A (Raster)**

**Quick Short Test Report**

**20 August 1993**

---

**Prepared By**

Air Force CALS Test Bed  
Wright-Patterson AFB, OH 45433

**AFCTB Contact**

Gary Lammers  
(513) 427-2295

**AFCTN Contact**

Mel Lammers  
(513) 427-2295

**DISTRIBUTION STATEMENT A**

Approved for public release;  
Distribution Unlimited

**DTIC QUALITY INSPECTED 3**

## DISCLAIMER

This document was prepared as an account of the work sponsored by the Air Force. Neither the United States Government, the Air Force, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, nor represents that its use would not infringe on privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the Air Force. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the Air Force, and shall not be used for advertising or product endorsement purposes.

Available to the public from the  
National Technical Information Service  
U.S. Department of Commerce  
5285 Port Royal Rd.  
Springfield, VA 22161

This report and those involved in its preparation do not endorse any product, process, or company stated herein. Use of these means by anyone does not imply certification by the Air Force CALS Test Network (AFCTN).

---

---

## Contents

1.	Introduction.....	1
1.1.	Background.....	1
1.2.	Purpose.....	2
2.	Test Parameters.....	3
3.	1840A Analysis.....	5
3.1.	External Packaging.....	5
3.2.	Transmission Envelope.....	5
3.2.1.	Tape One (88).....	5
3.2.1.1.	Tape Formats.....	5
3.2.1.2.	Declaration and Header Fields.....	6
3.2.2.	Tape Two (260).....	7
3.2.2.1.	Tape Formats.....	7
3.2.2.2.	Declaration and Header Fields.....	7
4.	IGES Analysis.....	8
5.	SGML Analysis.....	8
6.	Raster Analysis.....	8
7.	CGM Analysis.....	9
8.	Conclusions and Recommendations.....	10
9.	Appendix A - Tapetool Report Logs.....	11
9.1.	Tape One.....	11
9.1.1.	Tape Catalog.....	11
9.1.2.	Tape Evaluation Log.....	13

---

9.1.3.	Tape File Set Validation Log.....	16
9.2.	Tape Two.....	18
9.2.1.	Tape Scan Log.....	18
9.2.2.	AGFA CAPS Tape Read Log.....	22
10.	Appendix D - Detailed Raster Analysis.....	24
10.1.	Error Log validg4.....	24
10.1.1.	Output IGESView - D003R001.....	26
10.1.2.	Output IGESView - D004R001.....	27

## 1. Introduction

### 1.1 Background

The Department of Defense (DoD) Air Force Continuous Acquisition and Life-Cycle Support (CALS) Test Network (AFCTN) is conducting tests of the military standard for the Automated Interchange of Technical Information, MIL-STD1840A, and its companion suite of military specifications. The AFCTN is a DoD sponsored confederation of voluntary participants from industry and government managed by the Electronic Systems Center (ESC).

The primary objective of the AFCTN is to evaluate the effectiveness of the CALS standards for technical data interchange and to demonstrate the technical capabilities and operational suitability of those standards. Two general categories of tests are performed to evaluate the standards; formal and informal.

Formal tests are large and comprehensive, which follow a written test plan, require specific authorization from the DoD, and may take months to prepare, execute, and report.

Informal tests are quick and short, used by the AFCTN technical staff, to broaden the testing base. They include representative samples of the many systems and applications used by AFCTN participants. They also allow the AFCTN staff to gain feedback from many industry and government interpretations of the standards, to increase the base of participation in the CALS initiative, and respond to the many requests for help that come from participants. Participants take part voluntarily, benefit by receiving an evaluation of their latest implementation (interpretation) of the standards, interact with the AFCTN technical staff, gain experience using the standards, and develop increased confidence in them. The results of informal tests are reported in Quick Short Test Reports (QSTRs) that briefly summarize the standard(s) tested, the hardware and software used, the nature of the test, and the results.

## 1.2 Purpose

The purpose of the informal test, reported in this QSTR, was to analyze Cubic Defense System's interpretation and use of the CALS standards, in transferring technical Raster data. Cubic used its CALS Technical Data Interchange System to produce data, in accordance with the standards, and delivered it to the AFCTN technical staff on two 9-track magnetic tapes. Both tapes contained the same files but were recorded at different densities.



---

## 2. Test Parameters

**Test Plan:** AFCTB 93-083

**Date of Evaluation:** 20 August 1993

**Evaluator:** George Elwood  
Air Force CALS Test Bed  
DET 2 HQ ESC/ENCP  
4027 Colonel Glenn Hwy  
Suite 300  
Dayton OH 45431-1672

**Data Originator:** John Akin  
Cubic Defense Systems  
9333 Balboa Avenue  
P.O. Box 85587  
San Diego CA 92186-5587  
(619) 277-6780 x2785

**Data Description:** Technical Raster Test (each tape)  
6 Document Declaration files  
20 Raster files

**Data Source System:** 1840

**HARDWARE**

**SOFTWARE** Unknown

**Unknown**

**Raster**

**HARDWARE**

**SOFTWARE** Unknown

**Unknown**

Evaluation Tools Used:

MIL-STD-1840A (TAPE)

SUN 3/280

AFCTN Tapetool v1.2.10 UNIX  
XSoft CAPS/CALS v40.4

MIL-R-28002 (Raster)

SUN SparcStation 2

ArborText g42tiff  
Carberry CADLeaf Plus 3.1  
AFCTN validg4  
AFCTN xrastb.sun4  
IGES Data Analysis (IDA) IGESView 3.0  
Island Graphics IslandPaint 3.0

PC 486/50

AFCTN validg4  
IDA IGESView Windows  
Inset Systems HiJaak Window V1.0

Standards

Tested:

MIL-STD-1840A  
MIL-R-28002A

### **3. 1840A Analysis**

#### **3.1 External Packaging**

The tapes arrived at the Air Force CALS Test Bed (AFCTB) enclosed in a box in accordance with ASTM D 3951. The exterior of the box was not marked with a magnetic tape warning label, as required by MIL-STD-1840A, para. 5.3.1.3.

The tapes were enclosed in a barrier bag as required by MIL-STD-1840A, para. 5.3.1.2. Inspection of the tape reels showed the labels indicating the recording density as required by MIL-STD-1840A, para. 5.3.1. Enclosed in the box was a packing list showing all files that were recorded on both tapes.

#### **3.2 Transmission Envelope**

The two 9-track tapes received by the AFCTB contained MIL-STD-1840A files. The files were named per the standard conventions.

##### **3.2.1 Tape One (88)**

###### **3.2.1.1 Tape Formats**

The first tape was run through the AFCTN Tapetool v1.2.10 utility. No errors were encountered while evaluating the contents of the tape labels. However, 10 notes were generated during this process.

A note was reported on the tape label version. MIL-STD-1840A permits the use of both version three and four. The use of the most current standard should be used and noted.

Nine notes related to the tape label Record Length field for Type D files. Type D files contain variable length records that do not span blocks. All of the Type D files written on the tape were flagged with an illegal value for Record Length. The D001 through D006 files were expected to be Type D according to MIL-STD-1840A. The AFCTN Tapetool Software is expecting a value of 260 in the Record Length field but encountered a record length of 88. MIL-STD-1840A

para. 5.2.1.3 requires the variable record size be a maximum of 256 bytes. ANSI X3.27 para. 7.2.3 further states that the length of a Record Control Word (RCW) must be included in a Measured Data Unit (MDU) record length computation. This adds four bytes to the 256 for a MDU total of 260 bytes. ANSI X3.27 para. 8.5.2.6 states that the Record Length field for Type D files shall contain the maximum length of a MDU. While MIL-STD-1840A permits variable length records. Some software programs are sensitive to the number 260 because it is used to limit the record size when unblocking data. Some systems need this value to declare the maximum allowable record size, as an attribute, of a file when it is created.

The tape was read using the XSoft CAPS read1840A utility without any reported errors.

Tape one meets the CALS MIL-STD-1840A for physical requirements.

### 3.2.1.2 Declaration and Header Fields

Six errors were found in the Document Declaration files. All six Document Declaration files were reported with an invalid change level. Shown below is an example of the errors reported. The chglvl record should be either the word ORIGINAL or the revision number, a change level number, and then the date. The submitted example is missing either a revision number or change level.

chglvl: C,19930308

\*\*\* ERROR (MIL-STD-1840A; 5.1.1.2) - Invalid change level encountered.  
\*\*\* NOTE (MIL-STD-1840A; 5.1.1.2) - Change level should be the word ORIGINAL or a Revision Number followed by a Change Level Number followed by a Change Level Date. They should be separated by a comma or space.

No errors were reported in any of the data file headers. Because of the reported errors in the Document Declaration files, tape one does not meet the CALS MIL-STD-1840A requirements.

---

### 3.2.2 Tape Two (260)

#### 3.2.2.1 Tape Formats

The second tape evaluated was recorded at 1600 BPI. When the tape was read an I/O error was reported by the AFCTN Tapetool. The error appeared to be at the end of the data written to the tape. Because of the error the header records were not evaluated by the software.

Starting with the second Raster file (D001R002), 19 of the 20 included files had reported errors in the EOF block marker. The block count did not match the expected count. The tape writing utility should count the number of blocks written and place this information in the EOF tape label. Shown below in a sample of the error.

Block Count: 000014

Implementation Identifier:

\*\*\* ERROR (ANSI X3.27; 8.5.1.13) - EOF1 Block Count does not equal  
to the actual block count. Expected => 14; Actual => 4

When the tape was read using the XSoft CAPS read1840A utility, the same error was reported. The system also hung at the end of the tape indicating the end of volume mark was missing. The tape reading utilities were still looking for additional information.

Tape two does not meet the CALS MIL-STD-1840A for physical requirements.

#### 3.2.2.2 Declaration and Header Fields

A visual inspection of the Document Declaration files and data file headers showed the same errors as defined in the first tape.

Because of the reported errors in the Document Declaration files tape two does not meet the CALS MIL-STD-1840A requirements.

#### 4. IGES Analysis

The tapes contained no Initial Graphics Exchange Specification (IGES) files.

#### 5. SGML Analysis

The tapes contained no Standard Generalized Markup Language (SGML) files.

#### 6. Raster Analysis

Both tapes contained 20 Raster files each. The files were compared between the tapes and found to be the same. The error checking was completed using the files from tape one.

All files were evaluated using the AFCTN *validg4* utility. This program reported that most of the files failed to meet the CALS MIL-R-28002A specification. All of the errors relate to missing EOF coding. Samples of the *validg4* error logs are included in the Appendix of this report.

The files were read into the AFCTN *xrastb.sun4* viewing utility. This utility reported the missing EOF coding but was able to display the files. All files appeared to be clean with few noted orphan pixels. All images appeared to have a minor slant.

The AFCTB has several tools for viewing Raster files. These tools are not used to generate a pass/fail but to report how commercially available software can handle the files. Many of these products are used in the development of technical publications and are good indicators of usability. The use of these products is not an endorsement nor an indication of CALS capability. All operations were performed using the default settings.

The files were converted using ArborText's *g42tiff* utility without a reported error. The resulting files were read into Island Graphics' *IslandPaint* and displayed. The missing EOF coding was not reported.

The Raster files were read into Carberry's *CADLeaf* software without a reported error. The images were displayed with

the slant being noted. The missing EOF coding was not noted.

The files were read into IDA's *IGESView* and *IGESView for Windows* and displayed. The Sparc UNIX version of the software reported some of the missing EOF coding.

The files were read into Inset Systems' *HiJaak for Windows* and displayed without a reported error.

The Raster files were converted using Rosetta Technologies' *Prepare* without a reported error. The resulting files were read into *Preview* and displayed.

The included Raster files on these tapes do not meet the MIL-R-28002A specification.

## 7. CGM Analysis

The tapes contained no Computer Graphics Metafile (CGM) files.

## 8. Conclusions and Recommendations

The physical structure of the two tapes, submitted by Cubic Defense Systems, did not meet MIL-STD-1840A requirements. Both tapes had errors in the Document Declaration files. Tape two had errors with all but one Raster file. The reported error was an incorrect EOF block count.

Most of the Raster files on both tapes had a reported error. The reported error was missing EOF coding. However, even with this error, all of the utilities available in the AFCTB were able to display the images. The Raster files, on both tapes, do not meet the CALS MIL-R-28002A specification.

The tapes do not meet the CALS MIL-STD-1840A requirements.



## 9. Appendix A - Tapetool Report Logs

### 9.1 Tape One

#### 9.1.1 Tape Catalog

CALS Test Network Catalog Evaluation - Version 1.2; Release 10 (C)

Standards referenced:

- MIL-STD-1840A (1987) - Automated Interchange of Technical Information
- ANSI X3.27 (1987) - File Structure and Labeling of Magnetic Tapes  
for Information Interchange
- ANSI X3.4 (1986) - Coded Character Sets - 7 Bit ASCII

Fri Aug 20 12:00:36 1993

MIL-STD-1840A File Catalog

File Set Directory: /cals/u1210/Set015

Page: 1

File Name	File Type	Record Format/ Length	Block Length/Total	Selected/ Extracted
D001	Document Declaration	D/00088	02048/000001	Extracted
*** NOTE (MIL-STD-1840A; 5.2.1.3) - Unexpected maximum variable record size encountered. Header => 88, Expected => 260				
*** NOTE (ANSI X3.27; 8.5.2.6) - Record Length for Recording Format Type D shall be the maximum length of a Measured Data Unit (MDU).				
*** NOTE (ANSI X3.27; 7.2.3) - A variable length record shall be contained in a MDU. A MDU consists of a four byte Record Control Word (RCW) followed immediately by the variable record.				
*** NOTE (ANSI X3.4) - A Record Control Word shall consist of four characters that express the sum of the lengths of the RCW and the variable record.				
D002	Document Declaration	D/00088	02048/000001	Extracted
*** NOTE (MIL-STD-1840A; 5.2.1.3) - Unexpected maximum variable record size encountered. Header => 88, Expected => 260				
D003	Document Declaration	D/00088	02048/000001	Extracted
*** NOTE (MIL-STD-1840A; 5.2.1.3) - Unexpected maximum variable record size encountered. Header => 88, Expected => 260				
D004	Document Declaration	D/00088	02048/000001	Extracted
*** NOTE (MIL-STD-1840A; 5.2.1.3) - Unexpected maximum variable record size encountered. Header => 88, Expected => 260				
D005	Document Declaration	D/00088	02048/000001	Extracted

---

\*\*\* NOTE (MIL-STD-1840A; 5.2.1.3) - Unexpected maximum variable record size encountered. Header => 88, Expected => 260

D006	Document Declaration	D/00088 02048/000001	Extracted
------	----------------------	----------------------	-----------

\*\*\* NOTE (MIL-STD-1840A; 5.2.1.3) - Unexpected maximum variable record size encountered. Header => 88, Expected => 260

D001R001	Raster	F/00128 02048/000010	Extracted
D001R002	Raster	F/00128 02048/000004	Extracted
D001R003	Raster	F/00128 02048/000006	Extracted
D001R004	Raster	F/00128 02048/000008	Extracted
D001R005	Raster	F/00128 02048/000013	Extracted
D001R006	Raster	F/00128 02048/000013	Extracted
D001R007	Raster	F/00128 02048/000007	Extracted
D002R001	Raster	F/00128 02048/000015	Extracted
D002R002	Raster	F/00128 02048/000007	Extracted
D002R003	Raster	F/00128 02048/000008	Extracted
D002R004	Raster	F/00128 02048/000013	Extracted
D002R005	Raster	F/00128 02048/000006	Extracted
D002R006	Raster	F/00128 02048/000012	Extracted
D003R001	Raster	F/00128 02048/000059	Extracted
D004R001	Raster	F/00128 02048/000043	Extracted
D005R001	Raster	F/00128 02048/000037	Extracted
D006R001	Raster	F/00128 02048/000098	Extracted
D006R002	Raster	F/00128 02048/000033	Extracted
D006R003	Raster	F/00128 02048/000034	Extracted
D006R004	Raster	F/00128 02048/000028	Extracted

Catalog Process terminated with 0 error(s), 0 warning(s), and 9 note(s).

---

## 9.1.2 Tape Evaluation Log

CALS Test Network Tape Evaluation - Version 1.2; Release 10 (C)

Standards referenced:

ANSI X3.27 (1987) - File Structure and Labeling of Magnetic Tapes  
for Information Interchange

ANSI X3.4 (1986) - Coded Character Sets - 7 Bit ASCII

Fri Aug 20 12:00:10 1993

ANSI Tape Import Log

Allocating tape drive /dev/rmt0...

/dev/rmt0 allocated.

VOL1CALS01

3

Label Identifier: VOL1

Volume Identifier: CALS01

Volume Accessibility:

Owner Identifier:

Label Standard Version: 3

\*\*\* NOTE (ANSI X3.27; 8.3.1.8) - The Label Standard Version should be 4 to  
represent the current level of ANSI X3.27.

HDR1D001 CALS0100010001000100 93231 93231 000000DECFE11A

Label Identifier: HDR1

File Identifier: D001

File Set Identifier: CALS01

File Section Number: 0001

File Sequence Number: 0001

Generation Number: 0001

Generation Version Number: 00

Creation Date: 93231

Expiration Date: 93231

File Accessibility:

Block Count: 000000

Implementation Identifier: DECFE11A

HDR2D0204800088

00

Label Identifier: HDR2

Recording Format: D

Block Length: 02048

Record Length: 00088

Offset Length: 00

---

\*\*\*\*\* Tape Mark \*\*\*\*\*

Actual Block Size Found = 2048 Bytes.

Number of data blocks read = 1.

\*\*\*\*\* Tape Mark \*\*\*\*\*

EOF1D001                    CALS0100010001000100 93231 93231 000001DECFILE11A

Label Identifier: EOF1  
File Identifier: D001  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0001  
Generation Number: 0001  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 93231  
File Accessibility:  
Block Count: 000001  
Implementation Identifier: DECFILE11A

EOF2D0204800088

00

Label Identifier: EOF2  
Recording Format: D  
Block Length: 02048  
Record Length: 00088  
Offset Length: 00

<<<< PART OF LOG REMOVED HERE >>>>

HDR1D001R001                    CALS0100010007000100 93231 93231 000000DECFILE11A

Label Identifier: HDR1  
File Identifier: D001R001  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0007  
Generation Number: 0001  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 93231  
File Accessibility:  
Block Count: 000000  
Implementation Identifier: DECFILE11A

HDR2F0204800128 M 00

Label Identifier: HDR2  
Recording Format: F  
Block Length: 02048  
Record Length: 00128  
Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

Actual Block Size Found = 2048 Bytes.

Number of data blocks read = 10.

\*\*\*\*\* Tape Mark \*\*\*\*\*

EOF1D001R001 CALS0100010007000100 93231 93231 000010DECFILE11A

Label Identifier: EOF1  
File Identifier: D001R001  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0007  
Generation Number: 0001  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 93231  
File Accessibility:  
Block Count: 000010  
Implementation Identifier: DECFILE11A

EOF2F0204800128 M 00

Label Identifier: EOF2  
Recording Format: F  
Block Length: 02048  
Record Length: 00128  
Offset Length: 00

<<<< PART OF LOG REMOVED HERE >>>>

##### End of Volume CALS01 #####

##### End Of Tape File Set #####

Deallocating /dev/rmt0...

Tape Import Process terminated with 0 error(s), 0 warning(s),  
and 1 note(s).

---

### 9.1.3 Tape File Set Validation Log

CALS Test Network File Set Evaluation - Version 1.2; Release 10 (C)

Standards referenced:

MIL-STD-1840A (1987) - Automated Interchange of Technical Information

Fri Aug 20 12:00:37 1993

MIL-STD-1840A File Set Evaluation Log

File Set: Set015

Found file: D001

Extracting Document Declaration Header Records...

Evaluating Document Declaration Header Records...

srcsys: CUBIC DEFENSE SYSTEMS INC. 9333 BALBOA AVE. SAN DIEGO, CA 92123 FSCM 94987

srcdocid: 147345

srcrelid: NONE

chglvl: C,19930308

\*\*\* ERROR (MIL-STD-1840A; 5.1.1.2) - Invalid change level encountered.

\*\*\* NOTE (MIL-STD-1840A; 5.1.1.2) - Change level should be the word ORIGINAL  
or a Revision Number followed by a Change Level Number followed by  
a Change Level Date. They should be separated by a comma or space.

dteisu: 19770324

dstsys: ASC/YIL

dstdocid: NONE

dstrelid: NONE

dtetrm: 19930310

dlvacc: A011R, E010R

filcnt: R7

ttlcls: UNCLASSIFIED

doccls: UNCLASSIFIED

doctyp: Document/Drawing List

doctl: ADHESIVE

1 error(s), 0 warning(s), and 1 note(s) were encountered  
in Document Declaration File D001.

Found file: D001R001

Extracting Raster Header Records...

Evaluating Raster Header Records...

srcdocid: DL147345

94987 C

00010001UMEAHN

dstdocid: NONE

txtfilid: NONE

---

figid: NONE  
srcgph: NONE  
doccls: UNCLASS  
rtype: 1  
rorient: 000,270  
rpelcnt: 001888,002400  
rdensty: 0200  
notes: NONE

Saving Raster Header File: D001R001\_HDR  
Saving Raster Data File: D001R001\_GR4

<<<< PART OF LOG REMOVED HERE >>>>

Evaluating numbering scheme...  
No errors were encountered during numbering scheme evaluation.  
Numbering scheme evaluation complete.

Checking file count...  
No errors were encountered during file count verification.  
File Count verification complete.

A total of 1 error(s), 0 warning(s), and 1 note(s) were  
encountered in Document D001.

<<<< PART OF LOG FILE REMOVED HERE >>>>

Evaluating numbering scheme...  
No errors were encountered during numbering scheme evaluation.  
Numbering scheme evaluation complete.

Checking file count...  
No errors were encountered during file count verification.  
File Count verification complete.

A total of 1 error(s), 0 warning(s), and 1 note(s) were  
encountered in Document D006.

A grand total of 6 error(s), 0 warning(s), and 6 note(s) were  
encountered in this File Set.

MIL-STD-1840A File Set Evaluation Complete.

---

## 9.2 Tape Two

### 9.2.1 Tape Scan Log

CALS Test Network Tape Evaluation - Version 1.2; Release 10 (C)

Standards referenced:

ANSI X3.27 (1987) - File Structure and Labeling of Magnetic Tapes  
for Information Interchange

ANSI X3.4 (1986) - Coded Character Sets - 7 Bit ASCII

Sun Aug 22 15:13:54 1993

ANSI Tape Import Log

Allocating tape drive /dev/rmt0...

/dev/rmt0 allocated.

VOL1CALS01

4

Label Identifier: VOL1  
Volume Identifier: CALS01  
Volume Accessibility:  
Owner Identifier:  
Label Standard Version: 4

HDR1D001                    CALS0100010001000000 93231 00000 000000

Label Identifier: HDR1  
File Identifier: D001  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0001  
Generation Number: 0000  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 00000  
File Accessibility:  
Block Count: 000000  
Implementation Identifier:

HDR2D0204800260

00

Label Identifier: HDR2  
Recording Format: D  
Block Length: 02048  
Record Length: 00260



---

Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

Actual Block Size Found = 2048 Bytes.

Number of data blocks read = 1.

\*\*\*\*\* Tape Mark \*\*\*\*\*

EOF1D001                    CALS0100010001000000 93231 00000 000001

Label Identifier: EOF1  
File Identifier: D001  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0001  
Generation Number: 0000  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 00000  
File Accessibility:  
Block Count: 000001  
Implementation Identifier:

EOF2D0204800260

00

Label Identifier: EOF2  
Recording Format: D  
Block Length: 02048  
Record Length: 00260  
Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

<<<<< PART OF LOG FILE REMOVED HERE >>>>>

\*\*\*\*\* Tape Mark \*\*\*\*\*

HDR1D001R002                    CALS0100010008000000 93231 00000 000000

Label Identifier: HDR1  
File Identifier: D001R002  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0008  
Generation Number: 0000  
Generation Version Number: 00  
Creation Date: 93231

---

Expiration Date: 00000  
File Accessibility:  
Block Count: 000000  
Implementation Identifier:

HDR2F0204800128

00

Label Identifier: HDR2  
Recording Format: F  
Block Length: 02048  
Record Length: 00128  
Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

Actual Block Size Found = 2048 Bytes.

Number of data blocks read = 4.

\*\*\*\*\* Tape Mark \*\*\*\*\*

EOF1D001R002

CALS0100010008000000 93231 00000 000014

Label Identifier: EOF1  
File Identifier: D001R002  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0008  
Generation Number: 0000  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 00000  
File Accessibility:  
Block Count: 000014  
Implementation Identifier:

\*\*\* ERROR (ANSI X3.27; 8.5.1.13) - EOF1 Block Count does not equal  
to the actual block count. Expected => 14; Actual => 4

EOF2F0204800128

00

Label Identifier: EOF2  
Recording Format: F  
Block Length: 02048  
Record Length: 00128  
Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

---

<<<< PART OF LOG FILE REMOVED HERE >>>>

\*\*\*\*\* Tape Mark \*\*\*\*\*

HDR1D006R004                    CALS0100010026000000 93231 00000 000000

Label Identifier: HDR1  
File Identifier: D006R004  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0026  
Generation Number: 0000  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 00000  
File Accessibility:  
Block Count: 000000  
Implementation Identifier:

HDR2F0204800128

00

Label Identifier: HDR2  
Recording Format: F  
Block Length: 02048  
Record Length: 00128  
Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

Actual Block Size Found = 2048 Bytes.

Number of data blocks read = 28.

\*\*\*\*\* Tape Mark \*\*\*\*\*

EOF1D006R004                    CALS0100010026000000 93231 00000 000454

Label Identifier: EOF1  
File Identifier: D006R004  
File Set Identifier: CALS01  
File Section Number: 0001  
File Sequence Number: 0026  
Generation Number: 0000  
Generation Version Number: 00  
Creation Date: 93231  
Expiration Date: 00000  
File Accessibility:  
Block Count: 000454  
Implementation Identifier:

\*\*\* ERROR (ANSI X3.27; 8.5.1.13) - EOF1 Block Count does not equal  
to the actual block count. Expected => 454; Actual => 28

EOF2F0204800128

00

Label Identifier: EOF2  
Recording Format: F  
Block Length: 02048  
Record Length: 00128  
Offset Length: 00

\*\*\*\*\* Tape Mark \*\*\*\*\*

Rewinding tape to load point...

Deallocating /dev/rmt0...

Tape Import Process terminated with 20 error(s), 0 warning(s),  
and 0 note(s).

## 9.2.2 XSoft CAPS Tape Read Log

```
/cals/caps/Bin/read1840A: --- Read declaration file 'D001' ---  
/cals/caps/Bin/read1840A: --- Read declaration file 'D002' ---  
/cals/caps/Bin/read1840A: --- Read declaration file 'D003' ---  
/cals/caps/Bin/read1840A: --- Read declaration file 'D004' ---  
/cals/caps/Bin/read1840A: --- Read declaration file 'D005' ---  
/cals/caps/Bin/read1840A: --- Read declaration file 'D006' ---  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE1.R.cci'.  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE2.R.cci'.  
*** ERROR - block counts do not match ***  
    block count in trailer: 14, blocks read: 4  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE3.R.cci'.  
*** ERROR - block counts do not match ***  
    block count in trailer: 20, blocks read: 6  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE4.R.cci'.  
*** ERROR - block counts do not match ***  
    block count in trailer: 28, blocks read: 8  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE5.R.cci'.  
*** ERROR - block counts do not match ***  
    block count in trailer: 41, blocks read: 13  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE6.R.cci'.  
*** ERROR - block counts do not match ***  
    block count in trailer: 54, blocks read: 13  
/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE7.R.cci'.  
*** ERROR - block counts do not match ***
```

---

block count in trailer: 61, blocks read: 7

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE1.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 76, blocks read: 15

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE2.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 83, blocks read: 7

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE3.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 91, blocks read: 8

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE4.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 104, blocks read: 13

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE5.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 110, blocks read: 6

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE6.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 122, blocks read: 12

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE1.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 181, blocks read: 59

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE1.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 224, blocks read: 43

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE1.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 261, blocks read: 37

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE1.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 359, blocks read: 98

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE2.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 392, blocks read: 33

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE3.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 426, blocks read: 34

/cals/caps/Bin/read1840A: writing data file 'aftb9383b/NONE/NONE4.R.cci'.  
\*\*\* ERROR - block counts do not match \*\*\*  
block count in trailer: 454, blocks read: 28

---

## 10. Appendix D - Detailed Raster Analysis

### 10.1 Error Log validg4

density = 200  
path length = 1888  
scan lines = 2400  
bit format = MSB

error, scan length exceeds pel count  
s=401 a0=0 bstop=3024 pos=3078

file = r106.cal

density = 0  
path length = 0  
scan lines = 0  
bit format = MSB

error, scan length exceeds pel count  
s=1 a0=0 bstop=843 pos=2

file = r107.cal

density = 200  
path length = 2048  
scan lines = 2560  
bit format = MSB

error getcode, no match in 12 bits  
s=2560 word=2f0 pos=28326

file = r201.cal


density = 200  
path length = 2048  
scan lines = 2560  
bit format = MSB

error getcode, no match in 12 bits  
s=2560 word=2f0 pos=10774

density = 200  
path length = 2048  
scan lines = 2560  
bit format = MSB

error getcode, no match in 12 bits  
s=2560 word=2f0 pos=21988  
file = r206.cal

# 10.1.1 Output IGESView - D003R001

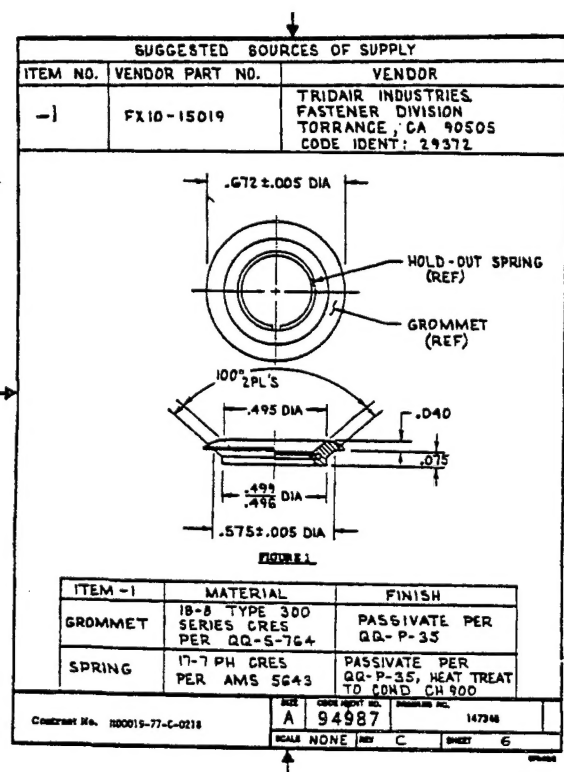



### 10.1.2 Output IGESView - D004R001

